


CLARO



Faster
Brighter
Sharper



6.0mm OUTDOOR LED


Claro OA6A is one-step ahead of the other LED systems with its guaranteed virtually real color and clearest display!

Claro OA6A LED Display Solution shows its reliable performance by working perfectly without any setback or lose of quality in very cold or very hot weather conditions.

FEATURES

- ◁ Rear Maintenance Access
- ◁ High Resolution
- ◁ High Refresh Speed
- ◁ Wide Viewing Angle
- ◁ 2 Year Warranty
- ◁ IP65 / IP54 Certificate
- ◁ Custom Production at Demanded Dimensions

VIEWING DISTANCE & ANGLES

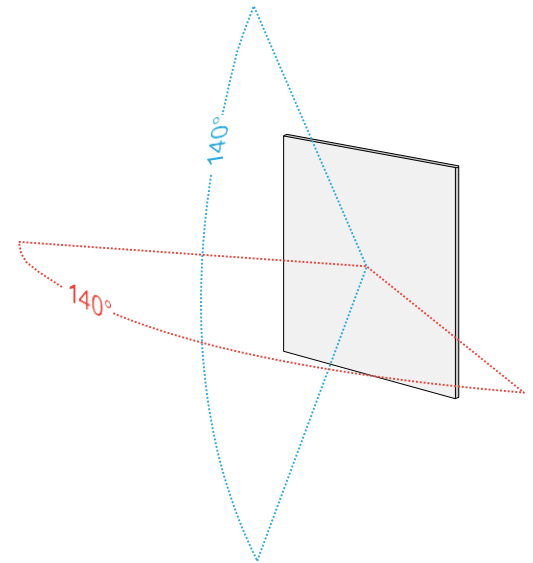

SPECS

ENVIRONMENT	OUTDOOR
MODEL	OA6A
PIXEL PITCH (mm)	6
PIXEL DENSITY (Pixel/m ²)	27777
PIXEL CONFIGURATION	1R1G1B
LED TYPE	SMD2525
MODULE SIZE (mm)	192x192
MODULE RESOLUTION (Pixel)	32x32
PANEL SIZE (mm)	960x960
PANEL RESOLUTION (Pixel)	160x160
DISPLAY COLORS	281 Trillion
COLOR TEMPERATURE	2000-10000K Adjustable
CONTRAST RATIO	6000:1
VIEWING ANGLE	140° (W)/ 140° (H)
VOLTAGE	220/110V AC
CABINET WEIGHT (kg)	42,8
MAX. POWER CONSUMPTION	≤848
AVERAGE POWER CONSUMPTION	≤425
BRIGHTNESS (CD/m ²)	≥6000
REFRESH RATE	1920 Hz
SCAN RATE	1/8
IP RATING	IP65-IP54
OPERATING TEMPERATURE/ OPERATING HUMIDITY	-20oC--50oC; 10-90%
LIFE SPAN	100,000 Hours
QUALITY CERTIFICATES	CE

*Performance specifications are typical. Due to constant research, specifications are subject to change without notice.