


CLARO

Faster
Brighter
Sharper



3.0mm INDOOR LED


Claro SG3 model, which provides anything you would expect from any led systems, is functional thanks to its ergonomic structure at cinemas, airports, shops and any utilization area that you can imagine.

Claro SG3 Indoor LED Display Solution, which dazzles with its bright image, carries the image quality to the highest level by its clearness.

FEATURES

- ◁ Front & Rear Maintenance Access
- ◁ High Resolution
- ◁ High Refresh Speed
- ◁ Wide Viewing Angle
- ◁ 2 Year Warranty
- ◁ Custom Production at Demanded Dimensions

VIEWING DISTANCE & ANGLES

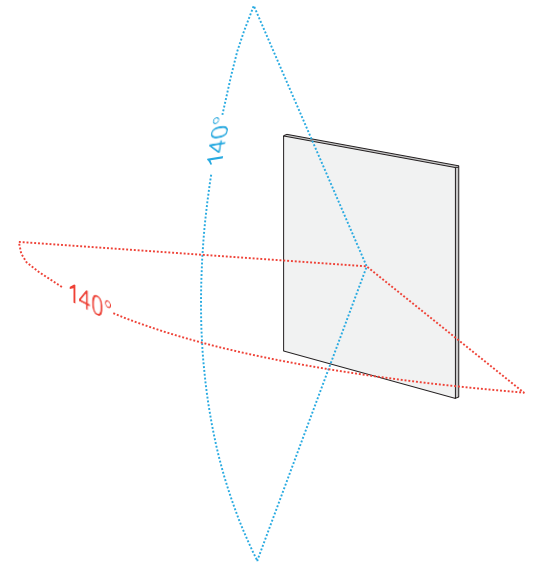

SPECS

ENVIRONMENT	INDOOR	INDOOR
MODEL	SG3	SG3.07
PIXEL PITCH (mm)	3	3.07
PIXEL DENSITY (Pixel/m ²)	111111	105626
PIXEL TYPE	1R1G1B	1R1G1B
LED TYPE	SMD2121	SMD2121
MODULE SIZE (mm)	192x192	320x160
MODULE RESOLUTION (Pixel)	64x64	104x52
PANEL SIZE (mm)	576x576	640x480
PANEL RESOLUTION (Pixel)	192x192	208x156
DISPLAY COLORS	281 Trilyon	281 Trillion
COLOR TEMPERATURE	2000-13000K Adjustable	2000-13000K Adjustable
CONTRAST RATIO	5000:1	5000:1
VIEWING ANGLE	140° (W)/ 140° (H)	140°(W)/ 140°(H)
VOLTAGE	220/110V AC	220/110V AC
CABINET WEIGHT (kg)	10,21	9,67
MAX. POWER CONSUMPTION	≤526	≤430
AVARAGE POWER CONSUMPTION	≤264	≤145
BRIGHTNESS (CD/m ²)	800~1200	800~1200
REFRESH RATE	3840 Hz	3840 Hz
SCAN RATE	1/32	1/26
IP RATING	IP31	IP31
OPERATING TEMPERATURE/ OPERATING HUMIDITY	-0oC~+45oC; 10-90%	-0oC~+45oC; 10-90%
LIFE SPAN	100,000 Saat	100,000 Hours
QUALITY CERTIFICATES	CE	CE

*Performance specifications are typical. Due to constant research, specifications are subject to change without notice.